設計/13827777382

WWW.SAMEKOM.COM

FOSHAN NANHAI SAMEKOM ECO-DOOR CO.,LTD

Add: No.1 Yiheng Road,Xizi Industrial Zone,Lishui Town Nanhai District, Foshan City, Guangdong China

Tel: +0086-757-86677569 Fax:+86-757-86677026

SAMEKOM

The samekom hospital door set includes features designed to increase impact resistance and durability in high-use situations. The aluminum honey core, flush-panel door is pre-hung on high quality hinges in a aluminum frame. Doors are available as single leaf or pair leaf, finished in a variety of facings.

SPECIFICATION

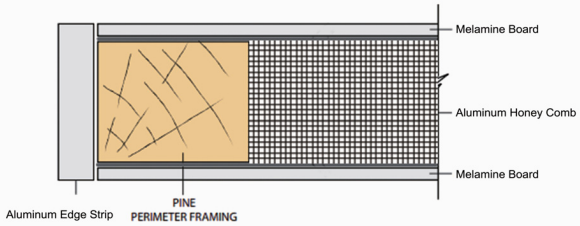







SPECIFICATION

Door Leaf thickness:40mm

Facing:Melamine board&Fireproof board

Framing:Aluminum alloy

Infilling:Aluminum honey comb

Kick Plate:Aluminum alloy or Stainless steel

Vision Panel:5mm tempered glass

Hardware:High quality hinges,lock and latch.

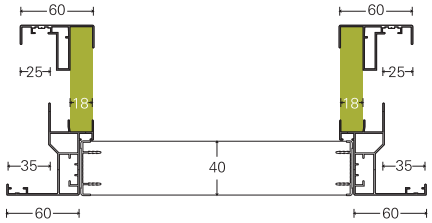

SPECIFICATION

Door Leaf thickness:40mm

Facing:Melamine board&Fireproof board

Framing:Aluminum alloy

Infilling:Aluminum honey comb

Kick Plate:Aluminum alloy or Stainless steel

Vision Panel:5mm tempered glass

Hardware:High quality hinges,lock and latch.

TOPCON

SPECIFICATION

Door Leaf thickness:40mm

Facing:Melamine board&Fireproof board

Framing:Aluminum alloy

Infilling:Aluminum honey comb

Kick Plate:Aluminum alloy or Stainless steel

Vision Panel:5mm tempered glass

Hardware:High quality hinges,lock and latch.

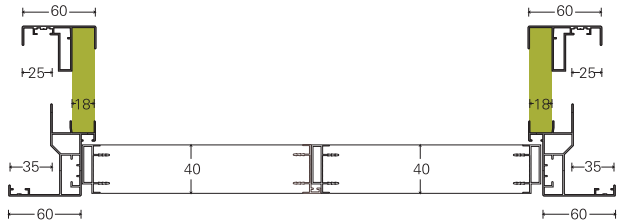

SPECIFICATION

Door Leaf thickness:40mm

Facing:Melamine board&Fireproof board

Framing:Aluminum alloy

Infilling:Aluminum honey comb

Kick Plate:Aluminum alloy or Stainless steel

Vision Panel:5mm tempered glass

Partition:Double glass with aluminum blinds

Hardware:High quality hinges,lock and latch.

SPECIFICATION

Door Leaf thickness:40mm

Facing:Melamine board&Fireproof board

Framing:Aluminum alloy

Infilling:Aluminum honey comb

Kick Plate:Aluminum alloy or Stainless steel

Vision Panel:5mm tempered glass

Hardware:High quality hinges,lock and latch.

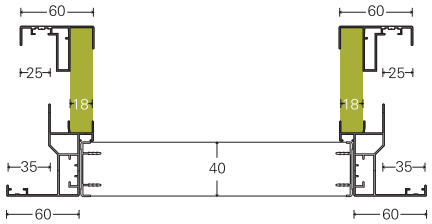

SAMEKOM

SAMEKOM

CUSTOMIZED MEDICAL SLIDING DOOR

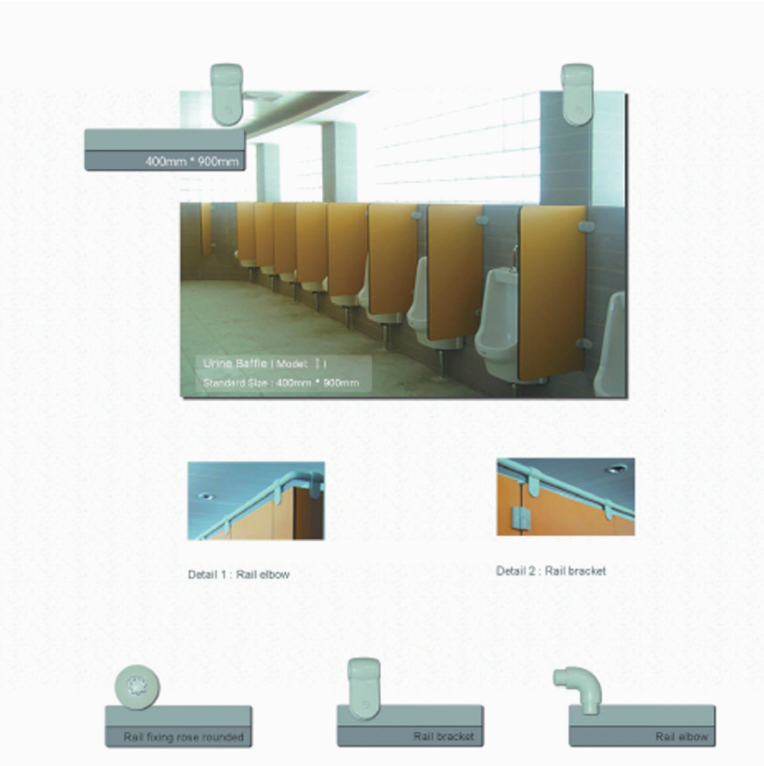

SPECIFICATION

(1) Toilet partition floor material: the ground should be waterproof, dirt, non-slip granite, height should be lower than other ground 10 — 20mm, floor drain should be less than about 10mm, to facilitate drainage.

(2) Toilet partition top surface material: top surface by the impact of water vapor, the most easy to mold, heat-resistant material with waterproof better. Generally use colorful acrylic molding and shaping aluminum buckle ceiling, these materials are water-resistant and strong, surface and affixed with an insulating material, the bathroom ceiling ideal wood, standard to 120mm wide and 300mm * 300mm square shaped main surface configured with two empty plates and micro. Acrylic molded ceiling lower prices, but easy to aging; colorful molding Ivkou higher prices, but a variety of colors, durability, is the main material used in modern bathroom ceiling. In addition, the use of aluminum plate or calcium silicate board, which is coated with cement paint, lower prices, waterproof and strong.

(3) Toilet partition wall material: the biggest bathroom wall area shall choose waterproof and strong, but also has anti-corrosion and mildew resistant material. Easy to clean tile, marble, mosaic and so much color can be rich collage pattern is smooth and easy to dry wall material is very useful, but be careful with the ground material color unity. For example, toilet partition, toilet partition such materials metal materials in addition to water but also have many other advantages. Such as light weight, energy saving, easy to install, maintain and recyclable and strong; high strength, stiffness, and easy to distort, carrying large; even when subjected to external impact forces, able to maintain its shape is not easy to change. Good sound insulation, insulation, insulation, moisture, fire effects, non-toxic, environmentally friendly; and so many other advantages.

SPECIFICATION

Lead lined doors are most commonly used in areas of medical facilities where radiation is present. Samekom can provide doors constructed utilizing various lead thicknesses. Samekom are also able to factory glaze (inc. Radiation glass) vision panel.

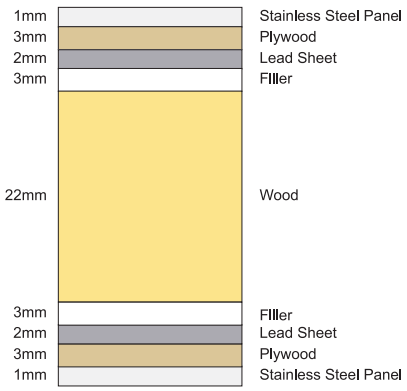

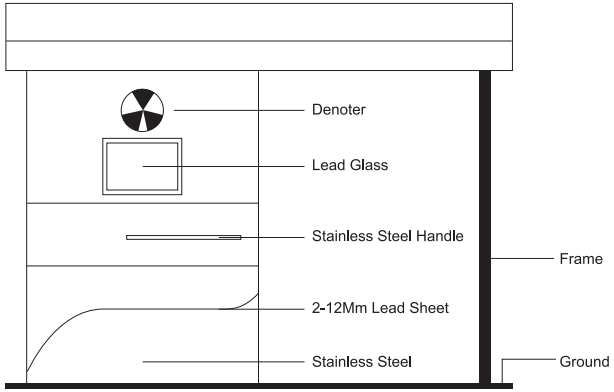

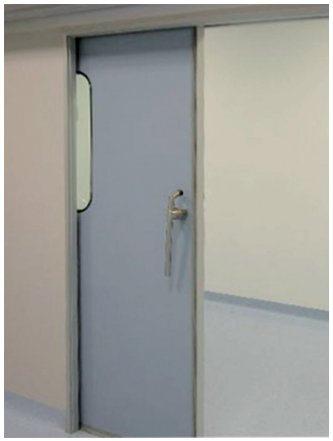

SPECIFICATION

SAMEKOM cleanroom doors can be configured as single/double swing-out or as horizontal sliding either manual, automatic or semiautomatic. SAMEKOM pharmaceutical door panels are assembled with the same panels of the wall system. Swing out doors are designed to fit flush with both sides of the wall panel system and are supplied in several dimensions. The internal framework is constructed of welded extruded aluminum profiles. The external frames are manufactured with rounded anodized or epoxy coated aluminum profiles with air tight dual gaskets. All fasteners for the hinges and latches can be recessed into the door frame. Standard hinges allow doors to swing 180* degrees from full open to full closed position.

001

002

003

004

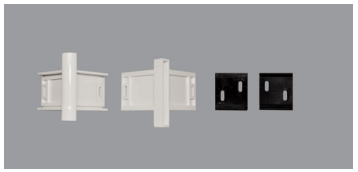

SPECIFICATION

Skirting measurement:

60Mm,80mm,100mm and 120mm height with white,silver,golden,black color etc.

01

02

03

04

05

06

Note: the baseboard 6 cm, 8 cm, 10 cm high selection.

MEDICAL EQUIPMENT BELT





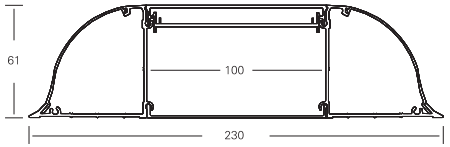

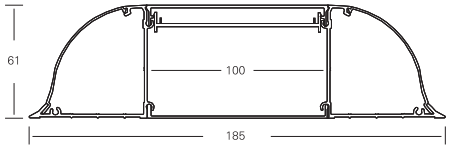

DOOR TYPES:DIFFERENT SOLUTIONS FOR DIFFERENT REQUIREMENTS

SINGLE DOOR

001

002

003


004

UNEQUAL DOOR


005


006


007

DOUBLE DOOR


008


009


010

HARDWARE

Standard Lock

Visible Hinges

Door Closer

Door Stopper

Panicbar

Hidden Hinges